

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A




B

C

D

E

F

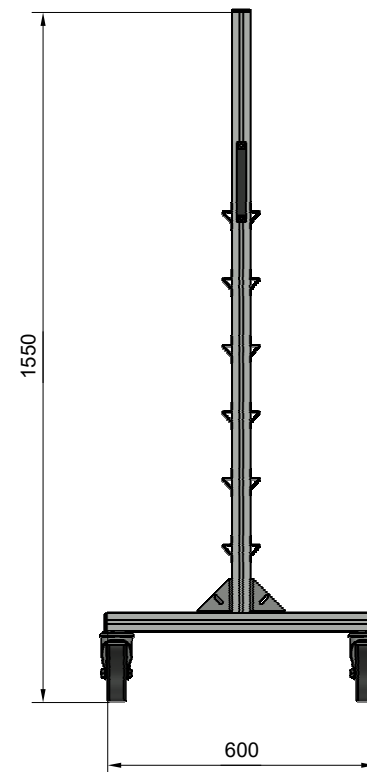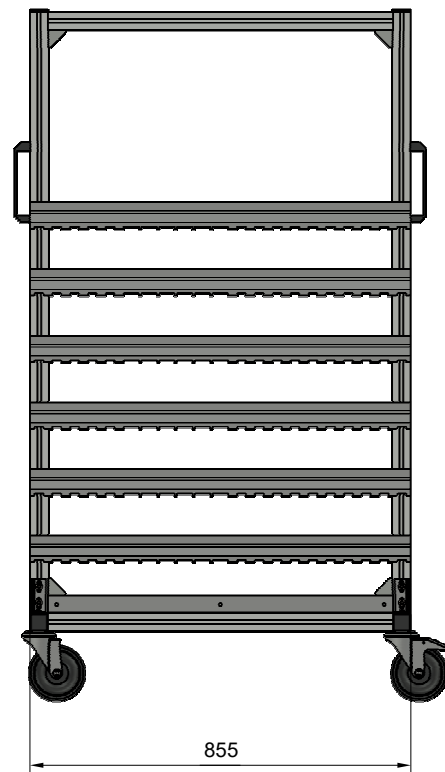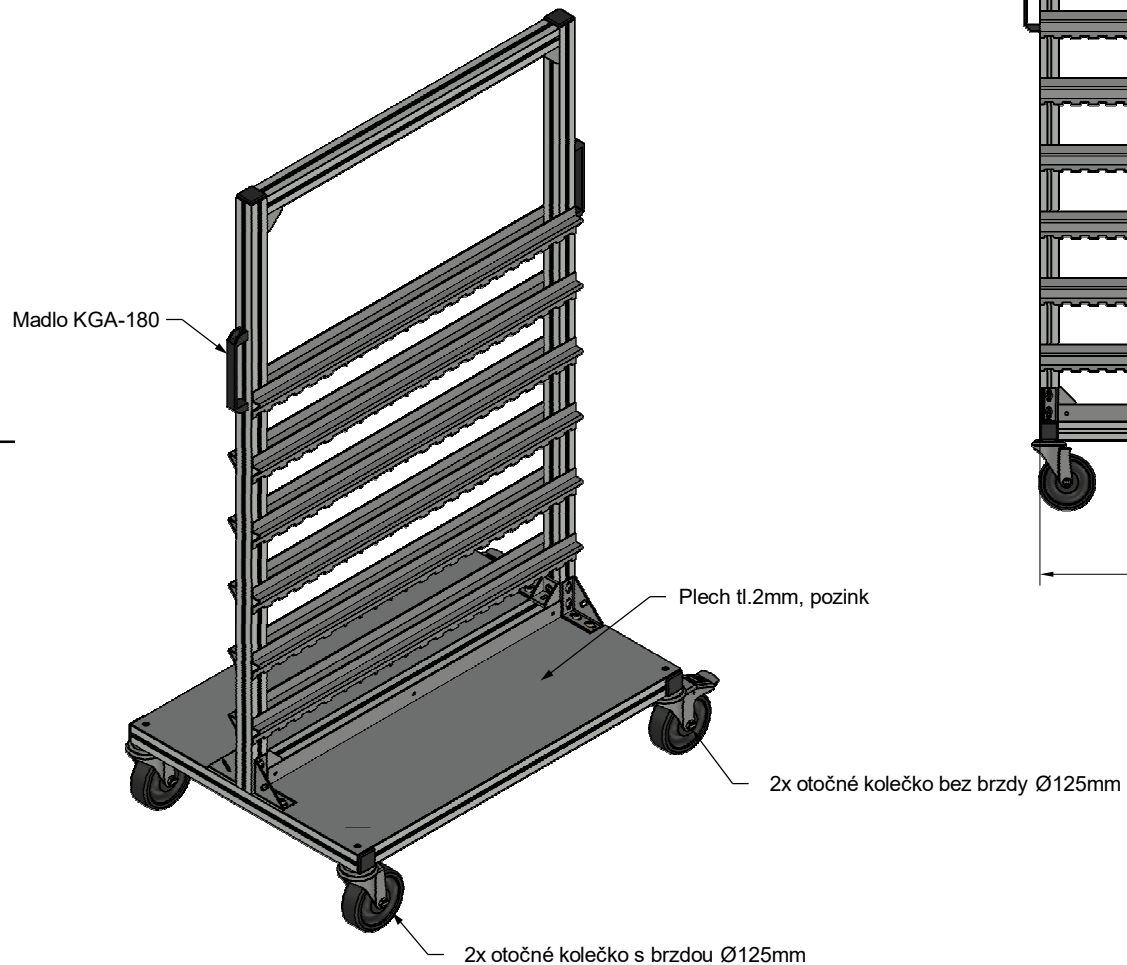

|   |  |           |                                   |         |                       |
|---|--|-----------|-----------------------------------|---------|-----------------------|
| Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v |  |           |                                   |         |                       |
| -Machining details and finish classification to DIN ISO 1302  |  |           |                                   |         |                       |
| E   | Total load capacity*: <b>400 kg</b>        |           | Load capacity - floor*: <b>kg</b> |         |                       |
|   | (Celková nosnosť:*)                        |           | (nosnosť na patro:*)              |         |                       |
|   | Scale                                      | <b>A3</b> | Drawn                             | Checked | Dat. <b>12.3.2024</b> |
|   |  |           | Vlach                             |         |                       |
|   | Title <b>Enprag s.r.o.</b>                 |           |                                   |         | Sheet 1 of 1          |
|   | Title <b>Stojan oboustranný bez police</b> |           |                                   |         | Rev. <b>A00</b>       |
|   |  |           |                                   | Doc.Nr  | <b>24031106</b>       |

This document is the sole property of Enprag s.r.o. and may not be copied, duplicated, used or given to third parties without the written permission from Enprag s.r.o. Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:  
 - DIN ISO 2768-2-K  
 Tolerancing:  
 - DIN 7167

1 2 3 4 5 6 7 8